


Silver Cloud

Truck-Mounted Thermal Fogger
with Complete Remote Control

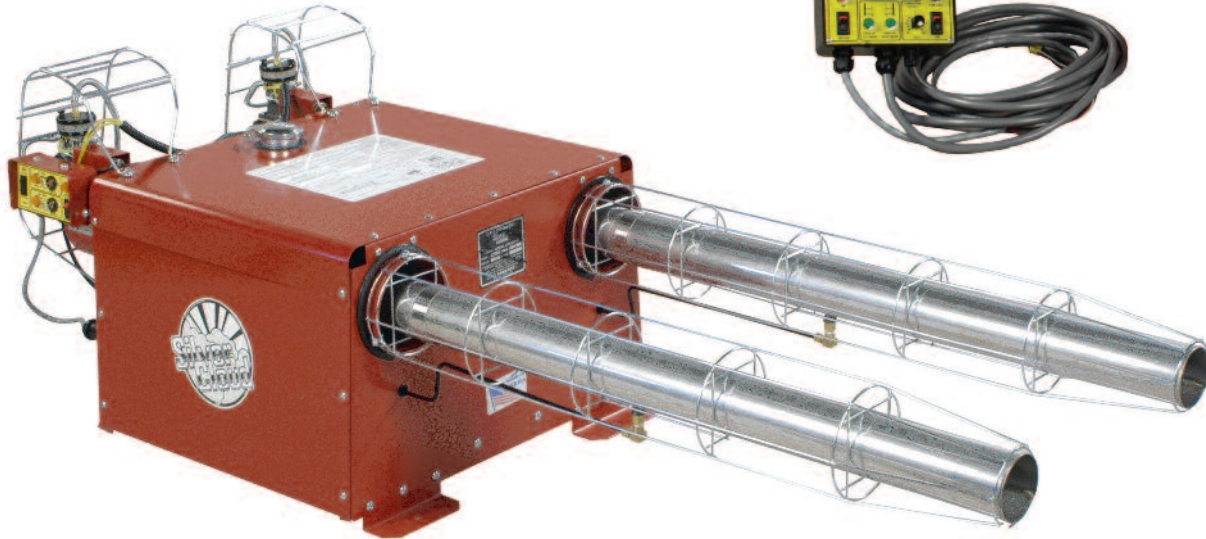

Remote Control Box

- Twin pulse-jet engines for prolonged life
- Engine cut-off button at operators hand
- Automatic cut-off of formulation pump in the event of engine failure
- All formulation controls at operators hand
- Can be coupled to any standard chemical drum
- Formulation and fuel tanks are not pressurized

Utilizes twin resonant pulse-jet engines. Produces high output of dense fog for the control of flying insects such as mosquitoes, gnats, house flies, sand flies and black flies.

The latest designs are used in the construction of the air and fuel systems to ensure reliable and consistent starting and running. A new feature is the ability to start the machine directly at the engines.

Remote control box allows the operator to control the running of the engines and the fog output from the cab.

| Part # | Description |
|----------|---|
| 53000 | Silver Cloud Truck-Mounted Thermal Fogger |
| 53000-20 | Silver Cloud Truck-Mounted Thermal Fogger |

SILVER CLOUD

SPECIFICATIONS

| | |
|----------------------|--|
| Formulation Output | 0-40 gallons/hr; 0-151.4 liters/hr; covers 250,000 cubic feet or 6500 cubic meters/min |
| Droplet Size | 0.5 - 50 microns VMD |
| Engine | Twin pulse-jet engines; 88 Hp; 66 kW; 56,000Kcal/hr |
| Fuel Consumption | 1.2 GPH; 4.5 liters/hr |
| Weight | Empty: 106 lbs; 48.2 kg. Full: 144 lbs; 65.5 kg |
| Fuel Tank (aluminum) | 6 gallons; 9.5 liters; non-pressurized |
| Formulation Tank | Non-pressurized; belt driven, rotary gear pump Attachments provided to connect to 55 gallon (200 liter) drum. |
| Remote Control | Engine cut off; Formulation on / off Individual engine indicator light, fogging indicator light Fuel gauge, formulation output control |
| Dimensions | 68 x 24 x 22 inches; 170 x 60 x 55 cm (L x W x H) |
| Shipping Data | 73 x 27 x 23 inches; 185 x 69 x 58 cm (L x W x H) 141 lbs; 64 kg 26.2 cubic feet; 0.74 cubic meter |